

- AC Power  
For Business-Critical Continuity™

## Liebert® PSA Line-Interactive UPS™

Performance Power Protection For PC's and Office Equipment

The Liebert PSA is an economical, environmentally-friendly line-interactive UPS that offers full-featured power protection for small office computers and electronic equipment. Liebert MultiLink software automatically powers down your computer in the event of an extended power outage. It also has full event management and display UPS instrumentation on screen.

Designed with simple controls for easy operation, the Liebert PSA provides up to five minutes of back-up time at full load ... more than enough time to save work in process and shut down your system. Liebert MultiLink USB shutdown software and a USB cable are also included, to allow remote alerts and automated graceful shutdown of the UPS and connected systems.



### The Liebert PSA Is Ideally Suited For:

- Professional Desktop PC's
- Professional Workstations
- Small Routers, Bridges and Hubs
- Point-of-Sale Terminals
- Other Sensitive Electronics



#### Liebert MultiLink software provides you:

- Warnings to computer users of power loss, and graceful operating system shutdown when needed
- Full functionality and automatic shutdown protection right out of box - virtually no configuration is required

### Liebert PSA UPS Supports Your Sensitive Electronics With These Standard Features:

#### Flexibility

- Available in four sizes, including 500, 650, 1000 and 1500VA; 120VAC or 230VAC
- Three to six battery-backed UPS outlets, depending on model size
- One to two surge-only outlets, differentiated by color
- USB communications / shutdown software and cable included
- User replaceable batteries

#### Reliability

- Up to five minutes of battery backup time at full load
- Full sequenced battery testing to ensure batteries are available when needed
- Advance early warning of UPS shutdown
- Lightning and surge protection (TVSS)
- RJ-45 port for data line surge protection


#### Low Total Cost of Ownership

- Two-year replace or repair warranty

#### Environmental Friendly

- Full RoHS R6 compliance

## Liebert® PSA Specifications

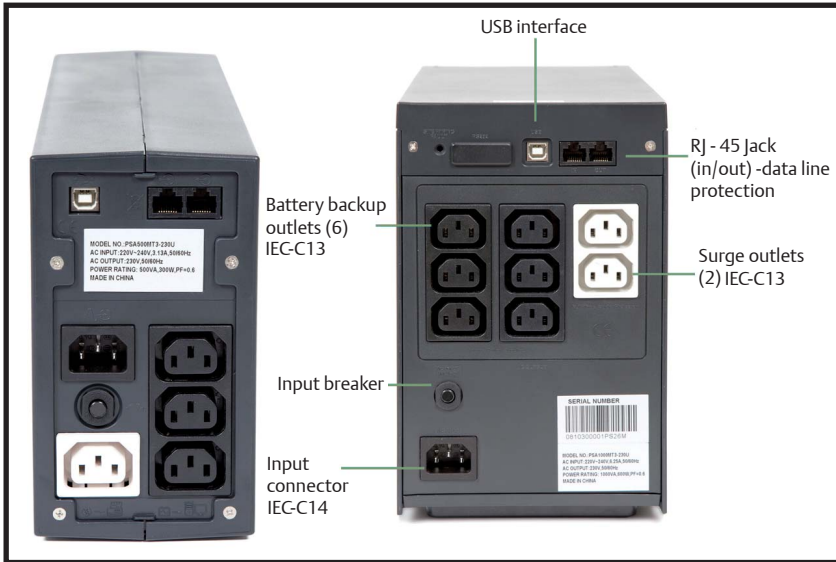

**Emerson Network Power Asia Pacific (Headquarters)**  
 T: 852-25722201  
 F: 852-28029250

**Australia**  
 T: 1800-065345  
 F: 61-2-97438737

**China**  
 T: 86-755-86010808  
 F: 86-755-86010909

**Hong Kong**  
 T: 852-25722201  
 F: 852-28310114

**India**  
 T: 91-22-67208000  
 F: 91-22-25828358

**Indonesia**  
 T: 62-21-2513003  
 F: 62-21-2510622

**Japan**  
 T: 81-3-54038594  
 F: 81-3-54032924

**Korea**  
 T: 82-2-34831502  
 F: 82-2-5927883

**Malaysia**  
 T: 603-7884 5000  
 F: 603-7884 5188

**New Zealand**  
 T: 64-3-3430235  
 F: 64-3-3430250

**Philippines**  
 T: 63-2-8934177 / 178  
 F: 63-2-8112027

**Singapore**  
 T: 65-64672211  
 F: 65-64670130

**Taiwan**  
 T: 886-2-2528 3535  
 F: 886-2-2528 3100

**Thailand**  
 T: 66-2-6178260  
 F: 66-2-6178277 / 278

**Vietnam**  
 T: 84-4-762 8908  
 F: 84-4-762 8909

### Communications/Shutdown Software:

Windows (98 and later) built-in power management functions provide monitoring of UPS status and manage the automatic orderly shutdown of the computer if a power outage ever exceeds the battery capacity of the UPS. Liebert Multilink USB shutdown and monitoring software is downloadable.

### PSA Specification

Specification	PSA500MT3-230U	PSA650MT3-230U	PSA1000MT3-230U	PSA1500MT3-230U
Input Connection	IEC-320 C14			
Output Connection	IEC-320 C13			
Number of battery-backed outlet	3	3	6	6
Number of surge outlet	1	1	2	2
Communication Interface	USB			
Dimensions: (mm)	95 x 356 x 171		147 x 360 x 234	
Net Weight: (kg)	6	6.5	10.3	12
Shipping Weight: (kg)	7	7.5	12.3	14
Form Factor	Mini Tower			
Software	Liebert Multilink 4, support for Windows NT/2000/XP/Vista			
Operation	PSA500MT3-230U	PSA650MT3-230U	PSA1000MT3-230U	PSA1500MT3-230U
Capacity (Volt-Amps, Watts)	500/300	650/390	1000/600	1500/900
Normal Input Power	230Vac, single phase with ground, 50 or 60Hz auto-select			
Input Voltage Window	160-287VAC			
Input Frequency Window	50/60Hz±5%			
Input Protection Type	Resettable Circuit Breaker			
Default frequency	50Hz			
Boost Mode Voltage	Input Voltage x 115%			
Buck Mode Voltage	Input Voltage / 115%			
Transfer Time (AC to DC)	4-6 ms typical			
Surge Protection	220 J			
Output (battery mode)	230VAC			
Voltage Regulation	≤ ± 5%			
Wave Form	Stepped Sine Wave			
Battery type	Sealed, non-spillage, maintenance-free, lead acid with 5 year typical lifetime			
Backup Time at full load	4 minutes	3 minutes	4 minutes	4 minutes
Typical Recharge Time	6-8 hours to 90%			
EMI Classification	IEC/EN/AS62040-2			
Agency Approvals	Safety: IEC/EN/AS62040-1-1 Transportation: ISTA Procedure 1A Certification WEEE and ROHS: Yes			
Operation Condition	3,000 meter max. elevation, 0-90% humidity non-condensing 0-40 deg. C			
Noise Level	< 40dBA on Line Mode			
<b>Runtime Chart</b>				
Typical Runtime (VA)	PSA500MT3-230U	PSA650MT3-230U	PSA1000MT3-230U	PSA1500MT3-230U
200	18 minutes	20 minutes	50 minutes	65 minutes
400	5 minutes	7 minutes	18 minutes	25 minutes
600	-	4 minutes	10 minutes	14 minutes
800	-	-	7 minutes	10 minutes
1000	-	-	4 minutes	7 minutes
1200	-	-	-	5 minutes
1400	-	-	-	4 minutes

\* Battery run time may vary depending on load

### Emerson Network Power.

The global leader in enabling *business-critical continuity*™.

- AC Power Systems
- Embedded Power
- Power Switching and Control
- Surge Protection
- Connectivity
- Integrated Cabinet Solutions
- Precision Cooling
- Embedded Computing
- DC Power Systems
- Outside Plant
- Site Monitoring
- Services

[www.EmersonNetworkPower-Partner.com](http://www.EmersonNetworkPower-Partner.com)